

It's Strong... It's mobile
It's a



SUSPENSION SYSTEMS



The **SKY CLIMBER**® "SUSPENSION SYSTEMS" are designed for use with any **SKY CLIMBER**® powered access platform.

This system combination forms a complete suspended access system and is a cost-effective complement to the range of **SKY CLIMBER**® products.


All systems are fabricated from heavy, hot dipped galvanised steel.

To meet or exceed all safety requirements, the suspension systems are CE approved and accepted world wide.



Operate in your work environment

- Sandblasting
- Commercial Restoration
- Painting
- Masonry
- Window Cleaning
- General Building Maintenance
- Off Shore oil rigs
- Boiler and digester Maintenance
- Ship Maintenance
- Caulking
- ...

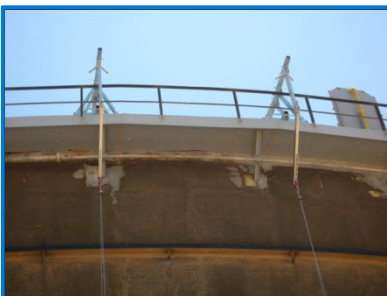

Roof Beam

Using a minimum number of component parts, the Roof Beam is designed to solve most standard rigging problems.

Our telescopic roof beam can be adjusted in lengths from 4900 mm till 6000 mm with a maximum 2000 mm outreach.

Our Roof Beam is equipped with double brake castor wheels for easy manoeuvring and safety.

Counterweights have carrying handles and fit counterweight boxes with additional safety locks.



Roof Hooks


The **SKY CLIMBER**® Parapet Roof Clamps are adjustable to fit most standard parapet walls. Special attention should be given to roof structure to ensure strength and integrity. Tie-backs should be used under all circumstances. Two standard models (400 kg and 800 kg) are available. **SKY CLIMBER**® reinforced Roof Hook is designed to be used with 500 kg maximum lifting capacity. Special Roof Rigs can be designed by **SKY CLIMBER**®'s experienced engineering staff to conform relevant safety standards, upon request.

Count on SKY CLIMBER®...backed by more than 55 years industry experience, known for many innovative, industry first achievements, leading a safe, fast and strong way into the future.




TECHNICAL SPECIFICATIONS:

TELESCOPIC ROOF BEAM

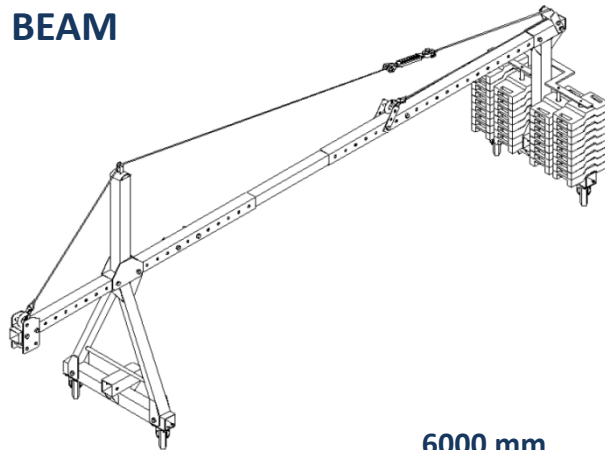


Overall Length:	6000 mm
Jib Length:	Max. 1500 mm with 800 kg Max. 2000 mm with 600 kg
Total Height:	2350 mm (incl. Antenna)
Parapet Height:	Max. 1200 mm
Self-weight:	168 kg
Counterweight:	25 kg/pcs (max. 36 pcs)
Safe Working Load:	Depending Jib Length Max. 1500 mm: 800kg Depending Jib Length Max. 2000 mm: 600 kg

ADJUSTABLE PARAPET CLAMP

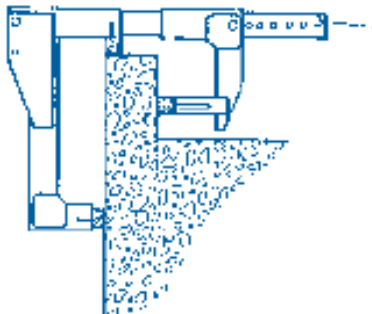

Safe Working Load:	400 kg
Self-weight 400 kg:	35 kg
Parapet width:	0 – 450 mm
Safe Working Load:	800 kg
Self-weight 800 kg:	70 kg
Parapet width:	50 – 500 mm

REINFORCED ROOF HOOK



Safe Working Load:	500 kg
Self-weight:	27 kg
Parapet width:	Max. 200 mm

Your Local Representative:

SKY CLIMBER

"Excellence in Access" Since 1955

WWW.SKYCLIMBER.COM

SAFETY – SERVICE – SOLUTIONS